



NAPCO®

333 Bayview Avenue

Amityville, New York 11701

For Sales and Repairs, (800) 645-9445

For Technical Service, (800) 645-9440

© NAPCO 2005

NP-RB1224VDC/6 BREAK-A-WAY RELAY 6 PACK

WI1331B 12/05




FEATURES

- Six (6) relay modules per cluster, each can easily be separated.
- 10 amp/120VAC/28VDC SPDT contacts.
- 12VDC or 24VDC selectable operation.
- Coil draws 50mA.
- Screw terminals allow up to 12-gauge wire.
- Board dimensions: 40mm W x 22mm H x 50.5mm L

INSTALLATION INSTRUCTIONS

1. In order to break the relay cluster apart (if desired) put a pencil on a flat surface, position the scoring line on top of the pencil and push lightly. Relay should easily breakaway from cluster.
2. Connect trigger input or voltage source to screw terminals marked [POS (+) & NEG (-)]. (Unit is factory set for 12VDC operation - cut jumper for 24VDC operation).
3. Connect screw terminals marked [N.C. (Normally Closed) or N.O. (Normally Open) and C (Common)] to operate desired devices.

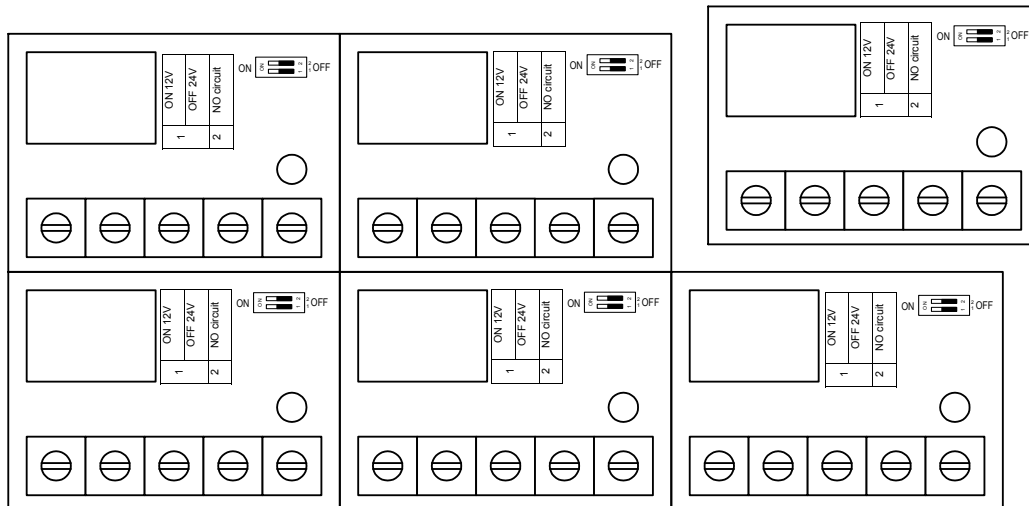

APPENDIX LIST

Item	Description	Dimension	Volume	Memo
1	Instruction Sheet	120*80	1	
2	Double Stick Foam Tape	60*20*7mm	6PCS	