




NAPCO®

333 Bayview Avenue
Amityville, New York 11701
For Sales and Repairs, (800) 645-9445
For Technical Service, (800) 645-9440

© NAPCO 2005

NP-DMOD-4OUT 4 OUTPUT POWER DISTRIBUTION MODULE

WI1337A 12/05

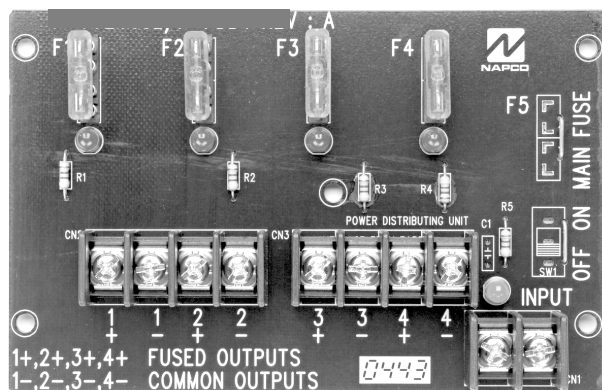

DESCRIPTION

A *Power Distribution Module*, the NP-DMOD-4OUT easily converts a single AC or DC output power supply into four (4) individually fused outputs.

FEATURES

- Surge protected outputs.
- Conveniently converts a single AC or DC input into four (4) individually fused outputs (fuses are rated @ 3 Amps fuses may be used).
- Handles up to 28VAC/VDC.
- Power output LED indicator.
- Board dimensions: 131.83mm(H) x 85.34mm(W) x 28mm(D)

INSTALLATION INSTRUCTIONS

1. Mount the NP-DMOD-4OUT in desired location/ enclosure.
2. Connect the desired power supply output to terminals marked [INPUT].


Note: If using DC voltage, left terminal is NEG. (-) and right terminal is POS. (+).

3. Connect each device to terminal pairs 1 to 4, marked [1+ 1- thru 4+ 4-].

Note: It is important to measure output voltage before connecting devices. This helps avoid potential damage.

All terminals with common suffix P 1+, 2+..." are same polarity.

4. Fuses rated at 3 Amps.

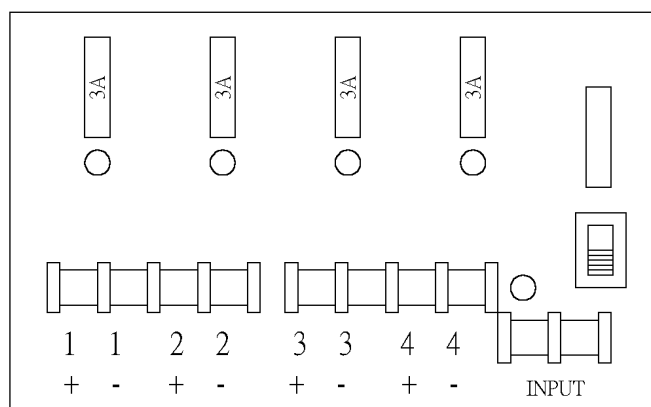

APPENDIX LIST

Item	Description	Dimension	Volume	Memo
1	Instruction Sheet	A4	1	
2	Double Stick Foam Tape	60*20*7mm	2	