


advanced access and egress solutions



ALARM LOCK

2006 - 2007

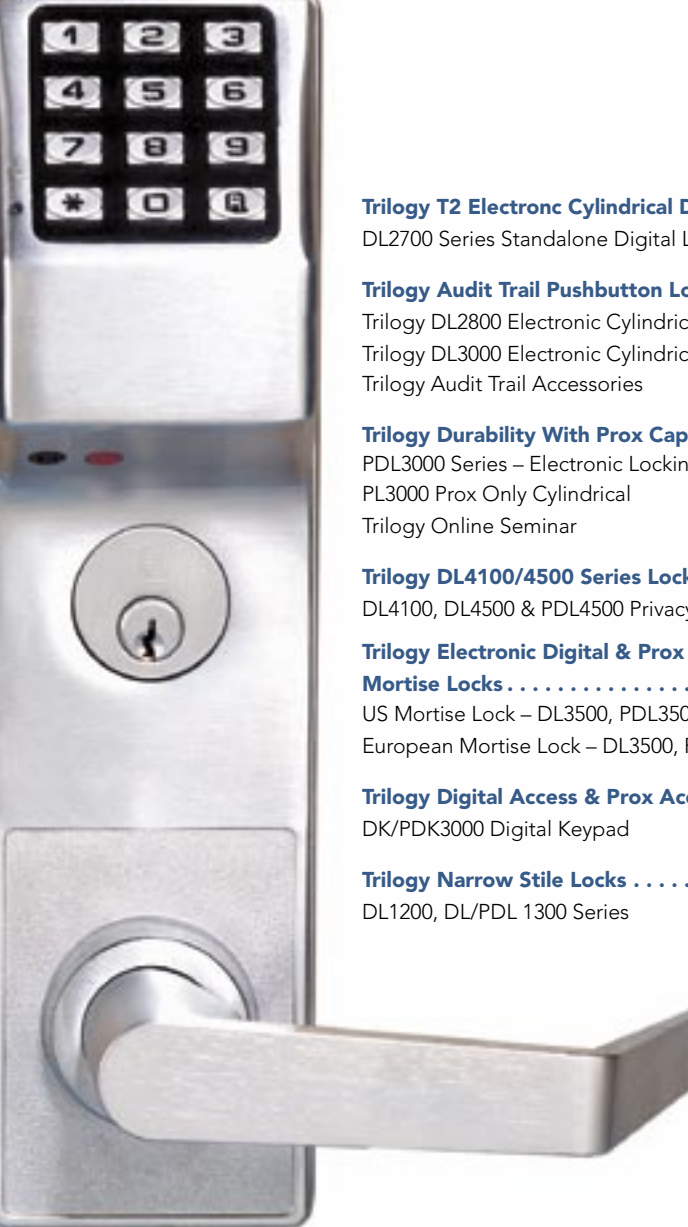

Trilogy T2 Electronic Cylindrical Digital Locks Page 2
DL2700 Series Standalone Digital Locks

Trilogy Audit Trail Pushbutton Locks Page 3
Trilogy DL2800 Electronic Cylindrical Digital Locks w/Audit Trail
Trilogy DL3000 Electronic Cylindrical Digital Locks w/Audit Trail
Trilogy Audit Trail Accessories

Trilogy Durability With Prox Capabilities Page 4
PDL3000 Series – Electronic Locking/Prox Systems
PL3000 Prox Only Cylindrical
Trilogy Online Seminar

Trilogy DL4100/4500 Series Locks Page 5
DL4100, DL4500 & PDL4500 Privacy/Residency Lock

Trilogy Electronic Digital & Prox Mortise Locks Page 6
US Mortise Lock – DL3500, PDL3500 Series
European Mortise Lock – DL3500, PDL3500 Series

Trilogy Digital Access & Prox Access Keypads. . . . Page 7
DK/PDK3000 Digital Keypad

Trilogy Narrow Stile Locks Page 8
DL1200, DL/PDL 1300 Series

TrilogyExit Adds Audit Trail To Panic Exits Page 9
Trilogy Panic Exit With Audit Trail

Advanced Door Alarms Page 10
PG21MS/MB Door Alarms
PG30 Door Alarm
PG10
LL1 Door Alarms

Alarm Lock Panic Exit Hardware Page 11
Model 715 Delayed Egress
Sirenlock Models 250 & 260
Models 700 & 710
Model 11A

Remote Release Mags, Powermags & RTEs Page 12
Remote Release PowerMag Kit RR-PM1200PAK
PowerMag Electromagnetic Locks
PowerExit Request-To-Exit Push Buttons
Electric Door Locks Models 103/104RA

Essential Add-ons And Extras Page 13
Strikes for Model 11A, Narrow Stile Mounting Bar, Rim
Cylinder, Finger Pull, Battery Eliminator, Double Door Holder,
Armored Door Loop, Single Door Strike, Double Door Strike,
Outside Access Door Pull, Mortise Cylinder

Trilogy Family of Products Chart Page 14
Ordering Information Page 15

There's a
Trilogy for
every
application

MODEL:	DL12/1300	DL2700	DL2800	DL3000	DL4100	DL3500	DL4500	ETDL	DK3000
Lock Type	Narrow stile	Cylindrical	Cylindrical	Cylindrical	Cylindrical	Mortise	Mortise	For Panic Trim	Keypad
Prox Reader model	PDL1300			PDL3000	PDL4100	PDL3500	PDL4500	ETPDL	PDK3000
Users	100 - 2000	100	200	DL3000 300; PDL3000 2000	2000	DL3500 300 PDL3500 2000	2000	2000	2000
Audit Trail	0 - 40000		1000	1600; 40000 (PDL)	40000	40000	40000	40000	40000
Schedules	0 - 500		150	150; 500 (PDL)	500	500	500	500	500
Privacy function					Yes		Yes		
Classroom/ Deadbolt						CR or DB	DB		
Weather proof -31 to 151°F	Standard	WP version	Standard	WP version	Standard	Standard	Standard	Standard	Standard
Handing	Non	Non	Non	Non	Non	Field Reversible	Field Reversible	Non	
Std. Door Thickness	1-3/4"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	
Std. Backset	31/32", 1-1/8" 1-1/2"	2-3/4"	2-3/4"	2-3/4"	2-3/4"	2-3/4"	2-3/4"		
Cylinder or IC Prep	mortise, incdd	key in knob or 9 ICs	key in knob or 9 ICs	key in knob or 9 ICs	key in knob or 9 ICs	mortise, incdd	mortise, incdd	rim cyl., incdd	
Finishes (US)	26D, 10B, MS, MB	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26/D, 3, 5, 10B, MS, MB

Trilogy®



hospital



retail



airport



schools



pharmacy



office

Keyless access locks trusted by more leading schools, universities and institutions

- Field-proven Trilogy® electronic standalone pushbutton locks available in cylindrical, mortise, exit trim or narrow stile (aluminum doors), in five architectural finishes. Easily add dependable wireless access control a door at a time, in an hour, with Grade 1 durability.
- Weatherproof, fingertip or PC programmable. Battery operated, choice of key override. Support up to 2000 PIN codes or use standard HID Prox ID cards/fobs.
- Multi-level user hierarchy including one-time service codes, group- or total lock-out codes and easy passage mode.
- Time-/date-stamped reports of door usage by user, printable at PC or wireless handheld printer.
- Automatic Lock/Unlock schedules 24-7, saves manpower costs.

HIPAA-compliant access control for securing private health records, generating audit trail reports.



DL2700
Our most popular digital lock



DL2800
Economical audit trail lock



DL3000
Advanced audit trail lock



DL4100
PIN or PIN/prox privacy-button lock



PDL3000
PIN/prox lock with audit trail



PL3000
Prox-only vandal proof lock



DK3000 & PDK3000
PIN, PIN/prox 12V/24V AC/DC weatherproof keypads



ETDL, ETPDL Retrofits with existing panic exit trim – most major brands. Automatically dog-down exit doors on real time schedule. Adds audit trail, too.



DL3500, PDL3500
Mortise PIN or PIN/prox locks



DL1200, PDL1300
Narrow stile PIN/prox locks

Trilogy T2: Electronic cylindrical digital locks



See Trilogy's special interchangeable core preps on page 15.

Trilogy® T2 standalone digital lock

DL2700 Series – Our Most Popular Cylindrical Lock

- Grade 1 Durability – BHMA Grade 1 Lockset with rugged clutch mechanism for exceptional strength and reliability.
- Standard IC Core models are prepped to accept, Best, Falcon, Arrow and KSP IC core cylinders. "Special Order Interchangeable Core Preps: Yale, Medeco, Sargent, Corbin/Russwin, Schlage
- Multi-level user capability, up to 100 different group or individual codes. 1 master, 10 managers, 90 basic users, 3 one time entry codes
- Individual, group or total user lockout codes
- Non-handed for easy installation and versatility
- 2-wire remote override or key bypass capability
- Passage Mode
- Visual and audible entry indicators
- Programmable relay functions
- Flex-Drive™ motor operates latch mechanism
- Also available with curved Regal handle: DL2775 version
- Also available in DL2750 Knob version (non weatherproof-only).
- "WP" Weatherproof Models -31°F to +151°F
- Available in five finishes: polished brass(US3), antique brass (US5), polished chrome (US26), satin chrome (US26D), duronodic (US10B).

See audit trail lock accessories on page 5 and ordering information chart on page 15.




Lever sets feature clutch mechanism ensuring longer life and complies with ADA specs providing barrier-free access to the disabled.



Curved regal handle option

Lever sets feature clutch mechanism ensuring longer life and complies with ADA specs providing barrier-free access to the disabled.

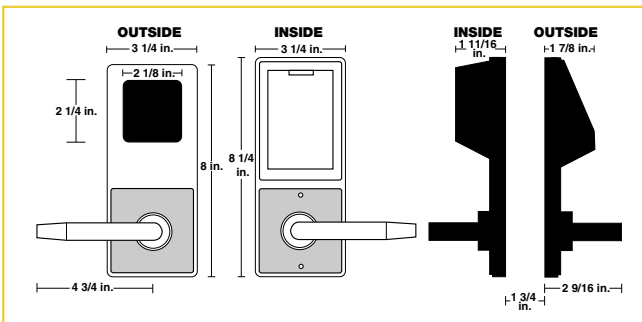

Trilogy: Choice of audit trail pushbutton locks

DL2800 Cylindrical Lock

- Rugged clutch mechanism insures long life & durability
- 150 scheduled events
- 200 User Codes: Master, Manager, Supervisor and Basic Users. Also one-time entry code
- 1000 Event Log
- All IC Core models include a large format key in knob cylinder, supporting Best, Falcon, Arrow and KSP. "Special Order Interchangeable Core Preps: Yale, Medeco, Sargent, Corbin/ Russwin, Schlage
- "WP" Weatherproof Models -31°F to +151°F
- Timed entry allowance from 5-15 seconds
- Greater security with "Temporary Keypad Lockout" after 3 unsuccessful code-entry attempts
- Audit Trail with Time/Date Stamp for a printable record of all electronic activity
- Real Time Clock
- 4 Quick Schedules of the most common routines
- Battery operated; uses 5 AA batteries
- Available in standard key override and interchangeable core models accepting 6 or 7 pin cores from Arrow, Best, Falcon, or KSP. Other IC core preps available.
- Available in five finishes: polished brass(US3), antique brass (US5), polished chrome (US26), satin chrome (US26D), duronodic (US10B).
- Available in standard Trilogy leverset (straight) or with new Regal (curved) lever

DL3000 Series Advanced Audit Trail Cylindrical Lock

Similar features to DL2700 and DL2800 Series, but with:

- 300 User Codes: Master, manager, supervisor & basic users
- 1600 Event Log
- 4 programming levels, 4 user groups
- 3, 4, 5 or 6 digit codes, 1-Time service code
- Real time clock
- Time zones
- 150 scheduled events (Lock/Unlock, Code Disable/Enable)
- 4 "Quick Schedules" of the most common routines
- 100% fingertip programmable or PC programmable with Alarm Lock DL-WINDOWS – Windows software
- Non-volatile memory
- Passage mode enabled by Master's and Manager's codes
- Optional hand-held AL-IR1 Infrared Printer may be used to print the Event Log and User Code list (See Pg. 4)
- Available in five finishes: polished brass(US3), antique brass (US5), polished chrome (US26), satin chrome (US26D), duronodic (US10B).
- All IC Core models include a large format key in knob cylinder, supporting Best, Falcon, Arrow and KSP. "Special Order Interchangeable Core Preps: Yale, Medeco, Sargent, Corbin/ Russwin, Schlage
- "WP" Weatherproof Models -31°F to +151°F

See audit trail lock accessories, right and ordering information chart on page 15.



As featured in free,
online Installation and
Training Seminar,
www.alarmlock.com

Accessories for all Trilogy audit trail locks



AL-DTMIII Data Transfer Module: Module used to transfer program data from the PC to the keypad and receive Audit Trail from the keypad. Can send program data for up to 96 keypads.



Trilogy PC Software Kit AL-PCI2. Windows-format software kit used to program Trilogy lock, codes, schedules, view audit trail reports. Kit includes DL-WINDOWS software and serial computer interface cable (required). **ALPCI2-U**, as above with USB interface cable



AL-IR1 Infrared Printer: Prints the event log and user code with hand-held convenience.



For Prox Models, AL-PRE: Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox Cards into DL-Windows (just tap the prox Card/fob device to the unit's faceplate to enroll)! Supports all Prox Cards and Prox Keyfobs. Simultaneous card enrollment, downloading or polling – all on just one serial port. 9V Battery operation.

audit trail

Prox reader capabilities: with Trilogy durability



Trilogy prox lock


PDL3000 Series PIN/Prox Cylindrical

- Accepts HID Proximity cards and keyfobs including 26, 33 and 37 bit formats etc.
- 2000 User codes; Master; manager; supervisor; basic users
- Users are individually programmed to use a card only, code only, or for the highest security – both card and code
- Up to 40,000 event Audit Trail with printed time/date stamped log of all electronic activity can be extracted from the lock by using the AL-IR1 (infrared printer), the AL-DTM2 (data transfer module) or AL-PCI (PC interface)
- Card data can be added to software via the lock, card reader module or PC
- Batch enroll feature allows many cards to be quickly added to the software via the lock without the use of a PC
- "WP" Weatherproof Models -31°F to +151°F
- Program data transferred to lock via AL-PCI (PC interface or AL-DTM2 (data transfer module)
 - Fingertip (keypad) or Windows PC-programmable
- Real time clock enables up to 500 scheduled events and

holiday schedules

- 5 AA batteries furnished; 60,000 cycles typical. Audible low battery alert
- 'Quick Passage' Mode enabled with an authorized user code and function code (does not require lock to be in program mode)
- Available in five finishes: polished brass (US3), antique brass (US5), polished chrome (US26), satin chrome (US26D), duronodic (US10B).
- Standard IC Core models are prepped to accept, Best, Falcon, Arrow and KSP IC core cylinders. "Special Order Interchangeable Core Preps: Yale, Medeco, Sargent, Corbin/Russwin, Schlage

See audit trail lock accessories on page 3 and ordering information chart on page 15.

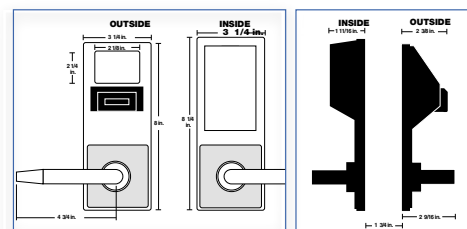

Trilogy keypad-free, vandal-proof prox lock

PL3000 Prox-Only Cylindrical

- Keyless lock accepts up to 2000 Prox ID
- Concealed electronics for ultra-durability, vandal resistance and dependability even in demanding or high-traffic locales
- Program users, authority levels and up to 500 lock/unlock events via Alarm Lock Windows-based PC software or with portable programmer (AL-DTM II)
- Prox Card enrollment mode for easy enrollment of user IDs directly at lock.
- 40,000 event audit trail log printable at PC or wireless handheld printer (ALIR1)
- Weatherproof for indoor and outdoor applications
- Mechanical key override uses standard knob in key cylinder (supplied). IC core models also available.

Free online Trilogy seminar

Available 24-7 at www.alarmlock.com

Learn to learn on your own schedule at your pace

- Installation
- Keypad programming
- PC software
- Set unlock/lock schedule
- Printing audit trails
- "Live" easy to understand demos
- High speed or dial-up connection option

Trilogy 101 is also available on CD from your Alarm Lock distributor or sales rep.

Trilogy 4100/4500 Series: Privacy & residency features



Standard Cylindrical Model

Flashing LED outside indicates the room is occupied.

Ideal anywhere temporary sessions of privacy are required:

- Single-occupancy restrooms
- Darkrooms
- Executive offices
- Faculty restrooms
- Dressing rooms
- Hospital on-call/sleeping rooms
- Confidential file rooms




• **"Privacy" feature.** With the push of a button on the back of the lock (inner door), the lock cannot be opened from the front entry side.

• **LED indicator on front** of the door will flash while privacy feature is active. Tri-colored LED indicator also shows code acceptance, denial or low battery condition.

- **Programmable "Residency" feature** allows users to close the door behind them and have the lock remain unlocked until it is physically relocked with PIN or Prox device.
- **2000 3 to 6 digit user codes:** Master; manager; supervisor; basic users. (PDL-Prox models support up to 2000 Prox. ID cards/fobs or codes.) One-time service codes. Total user lockout code. Keypad lockout after numerous attempts to "guess" codes.
- **Field-proven, standalone rugged keyless locks with vandal-proof, all-metal keypad**
- **Weatherproof for use inside and out** even in weather extremes from -31 degrees below to 151 degrees F on both sides of the door.
- **Fingertip (keypad) or Windows PC-programmable**
- **Scheduled Events:** Real time clock enables up to 500 scheduled events and holiday schedules. Program to lock/unlock; disable/enable users; 4 built-in time schedules
- **40,000 Event Audit Trail with Time/Date Stamped Log.**
- **Iconic bilingual Privacy and Residency Instructional Signs supplied with lock** (English and Spanish; shown above)

Residency feature prevents accidental occupant lock-outs.

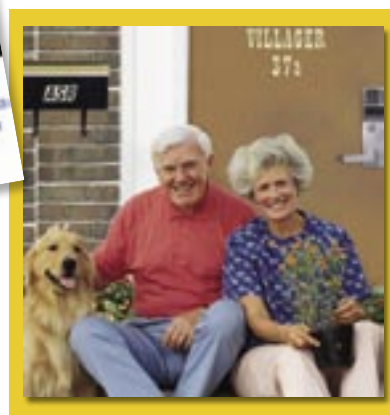

Also available in mortise model.

Trilogy Mortise: Electronic digital locks



Trilogy mortise locks – all the same features as the T3 DL3000 in a mortise lock

DL3500 Series


A. US Mortise Lock

B. European Mortise Lock

Similar in functionality to T3 DL3000 Series, plus:

- 300 User codes: Master, manager, supervisor & basic users
- Weatherproof – operates from -31°F to +151°F (-29°C to +66°C)
- Fingertip or Windows PC-programmable
- Real time clock enables up to 500 scheduled events and holiday schedules
- 40,000 Event Audit Trail provides a printed time/date- stamped log of all electronic activity
- Long-life batteries and low-battery alert
- US versions: Choose either Classroom or Deadbolt versions and left or right handing (If reverse hand is required, lock is field reversible.)
- Available in standard Trilogy US leverset (straight) or with new Regal (curved) handle trim. Euro version has curved handle as pictured in "B".
- Available in five finishes: polished brass (US3), antique brass (US5), polished chrome (US26), satin chrome (US26D), duronodic (US10B).
- 1 1/4" mortise cylinder supplied

See audit trail lock accessories on page 5 and ordering information chart on page 15. For privacy/residency version see page 4.

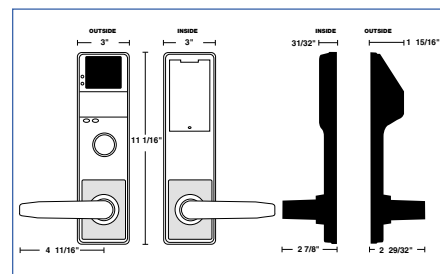

Trilogy prox mortise lock


PDL3500 Series

C. US mortise lock with prox

D. European mortise lock with prox

Similar in functionality to DL3500 Series, plus:

- Accepts most HID Proximity cards and keyfobs
- 2000 User codes; Master; Manager; Supervisor; basic users
- Users are programmed to use card only, code only, or card and code
- Card data can be enrolled into software via the lock, card reader module or PC
- Batch enroll feature allows many cards to be quickly added to the software via the lock
- Program data transferred to lock via AL-PCI or AL-DTM2
- Quick Passage Mode enabled with an authorized user code and function code (does not require lock to be in program mode)

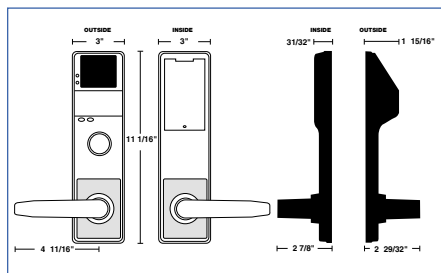

For privacy/residency version see page 4.



Also available in prox only model (PL3500) and privacy model (DL4500/PL4500)

See audit trail lock accessories on page 5 and ordering information chart on page 15.

Access Keypads: 12V/24V AC/DC with Trilogy features



Weatherproof 12/24V digital access keypad

Trilogy DK3000

- Ideal for use with 12V or 24V (AC or DC) electric door strikes, mag lock PM 1200, PM600 or Alarm Lock Remote Release Mag Lock Kit. See page 12.
- Easiest installation in minutes: Wall mount or single gang box
- Timed Egress Input allows door to open for 5, 10 or 15 seconds
- 2 High-Current Rated 8A Relays for entry, alarm zone shunting or lock release by real-time schedule
- Weatherproof, rugged all-metal 12-button keypad
- 2,000 user codes, master, manager, supervisor and basic
- 100% Fingertip or PC Programmable with familiar Trilogy method
- 40,000 Event Audit Trail: Query by PC or Handheld Printer or DTM2 Module
- Real time clock with time-zone adjustments, enables 500 scheduled or holiday events
- Independent Tamper-Report when attempts are made to vandalize or remove DK3000 via an alarm system
- Remote-Release Feature/Request-to-Exit Input

Digital access keypad with prox reader

Trilogy PDK3000

- Same features as DK3000 above, plus built-in proximity reader
- Accepts HID cards and keyfobs as well as digital PIN codes



keypads

Alarm Lock: Trilogy Narrow Stile Access Locks

PIN and PIN/prox aluminum door retrofit outside trim



DL1200 Series supports 100 users, fingertip/keypad programmable. (Includes 2 Lithium 3V batteries).

DL1300 Series supports 2000 users and includes 40,000 event audit trail and 500 event schedule. Keypad or PC programmable. (Includes 2 Lithium 3V batteries) (See accessories below.)

PDL1300 Series supports 2000 PIN or Prox users and includes 40,000 event audit trail and 500 event schedule. Keypad or PC programmable. (Includes 2 Lithium 3V batteries) (See accessories below.)

ALL MODELS FEATURE:

- Aluminum door retrofit outside trim for Adams Rite® 1850, 1950, 4710, 4070, 4730, 4900 Series and MS1850S and MS1950S Series latch locks.
- Field-proven, familiar Trilogy® programming & electronics
- PIN code and PIN/Prox Models support 100 to 2000 users (see model info.)
- 40,000 event audit trail in 1300 Series models, provides door usage activity reports at wireless handheld printer, laptop or PC.
- All-metal, vandal-resistant 12-button keypad supports 3-6 digit PIN codes, and multilevel user hierarchy (master, manager, supervisor, basic users)
- Keypad or PC programmable (see model info.). Quickly and easily add or delete users and enter "passage mode", service codes, group lock-out & group-enable
 - HID Prox ID cards, keyfobs and prox tags supported in PDL-1300 Series models featuring built in Prox reader. (High security applications can require use of both PIN code plus Prox ID for access.)
 - Real time clock and PC programmable automatic lock/unlock scheduling for 500 events (1300 Series models).
- Wide weatherproof operating range from -31 to 151°F (-35 to 66°C)
 - Wireless standalone locks: Long-life, battery- operated; Includes audible and visual low battery alert. (Uses standard off-the-shelf batteries.)
 - Non-handed; fully field-reversible
 - Key override; interchangeable cores supported (Corbin/Russwin, Yale, Schlage, Medeco)
 - Mortise Cylinder, 1-1/4" supplied. (Supports 1-1/8, 1-1/4 and 1-3/8")
 - Compact styling 14-3/8"H x 1-5/8"D x 1-3/4"W
 - Backsets 31/32", 1-1/8" and 1-1/2" ; Stile thickness 1-3/4"
 - Four attractive standard finishes US26D Satin Chrome, US10B Duronodic, MS Metallic Silver and MB Metallic Bronze

KIT ALSO AVAILABLE: Complete electronic and mechanical access retrofit kit including Trilogy electronic narrow stile trim and mechanical Adams Rite 4900 Series dead latch lock (specify either 1 1/8" or 1 1/2" backset for mechanical lock required).

narrow
stile

TrilogyExit: Adds audit trail convenience to panic exits

Add Trilogy convenience, programming, flexibility and audit trail to panic exit devices from most major manufacturers

OUTSIDE:
Rugged, field-proven Trilogy digital lock.



INSIDE:
Existing panic exit device – Most major brands supported

Also available
in prox only
model (ETPL)

TrilogyExit

- Clutch Mechanism insures long life and durability
- Fingertip and/or Windows Programmable
- 2000 User Codes: Master, manager, supervisor and users
- Real Time Clock for up to 40,000 Event Time/Date-Stamped Audit Trail
- Up to 500 Lock/Unlock Schedules (with Time Zone Support)
- Rugged 12-Button Metal Keypad
- Non-Handed; Fully Field Reversible
- Adaptable to most major manufacturers of standard RIM and IC RIM Cylinders
- Battery operated; uses 5 AA batteries

Also available in prox model for added convenience and security. Includes all of the features above plus:

- Accepts most HID Proximity cards and keyfobs
- Users are individually programmed to use a card only, code, only, or for highest security – both card and code
- Prox card data can be added to software by uploading from lock, by using AL-PRE or entering directly from computer using DL-WINDOWS software.

exit

Alarm Lock: Advanced multi-purpose door alarms

The PG21MS Series includes advanced narrow-stile microprocessor-controlled door alarms for surface mounting on a door or door frame. Typical applications include emergency fire escape doors, nursing home stairwell doors, rear restaurant and theater doors.

Advanced new features:

- New designer look
- Two selectable arming options
- Always armed mode – when key is turned counterclockwise to the disarm position, the key cannot be removed. To remove key, turn back to arm mode, thus keeping unit armed always.
- Standard arming mode – when key is inserted turning clockwise will disarm and key can be removed. Turning key clock will arm and key can be removed.
- Status Indicator – RED when armed.
- Entry/Exit delay time options – 15 seconds, 1 min 15 seconds & 3 min 15 seconds
- Key-controlled delivery mode. Door may be propped open, using key to enable authorized users to use door w/o sounding an alarm, eg., permitting scheduled delivery, etc.
- Door ajar/propped open mode. Jumper-selectable door-open detection period. If door is ajar, ie., propped open, following a period from 15 seconds to 3 minutes, the alarm will sound.
- Self-contained and dual-tamper supervised
- Convenient *No-Cut* jumpers
- Improved sweeping siren over 95db
- Visual magnetic alignment mode, eliminates templates
- Long-life 9V battery powered (supplied); Low battery alert.
- Strobe version for audible and visual *door in alarm* identification (shown above).

Non-strobe version also available with new and improved features (inset photo).

Model PG30:

Keypad-controlled narrow stile door alarm, similar to PG21, plus:

- Digital codes for master, management and passage (used for auto-arming)
- 3 security levels for: a) high security b) unattended applications c) flexible control for delivery doors, etc.
- Audible low battery warning
- 3 Programmable 95db siren styles: sweep, pulsed, and steady
- Logo key is dual function test button

PGKPD Accessory:

- For optional use with the PG30, this low-profile, brushed aluminum finished accessory provides all functions of the PG30 from the outside of the door. (Available in metallic silver only.)



Model PG10

- The Pilfergard Model PG10 is an exit door alarm designed to deter the use of the secured door by sounding a twin action alarm when opened by unauthorized personnel. The alarm can be bypassed from inside or outside by the use of a key. (Requires standard mortise cylinder not supplied.) This durable surface mount unit is easily installed and is tamper-supervised with two separate tamper switches. Its test button verifies battery. Optional AC power supply available.



Model LL1

- All of the features of the PG10 unit with addition of a flashing strobe for easy alarm identification.
- Choice of system controllers



Alarm Lock: Sirenlock panic exit deadbolt hardware

Sirenlock™ Models 250, 260, 700, and 710 are UL Listed panic alarm deadbolt devices which restrict unauthorized use of exit doors by sounding an alarm, while providing instant egress in emergencies



Delayed egress exit alarm

SIRENLOCK™ MODEL 715


- Offers stylish, cost-effective control of unauthorized use of exit doors
- 15 second delayed egress with instant 95db Dual Piezo alarm (meets UL specifications)
- Instant alarmed exit in case of actual emergency or fire (meets NFPA 1012 Life Safety Code)
- Easy-to-install, surface mount unit in a standard panic bar deadbolt/deadlatch design
- Monitoring output for simultaneous use of CCTV camera, secondary siren, remote monitoring console, etc.
- Smoke detector input can be used to power existing system or standalone smoke detector(s) (Includes armored door cord and cables for wiring)
- 9V battery back-up powers in event of power failure

Clapper plate & full door exit style alarms

A – SIRENLOCK™ MODEL 250/260

B – SIRENLOCK™ MODEL 700/710

- Deadbolt and deadlatch meet relatching requirements
- Blaring 95db dual tone siren
- Selectable 2-minute alarm or constant alarm
- 9V battery powered and audible low battery warning
- Meets or exceeds UL, CFM, ADA, NYC housing requirements
- 250/700 Models have changeable 2 minute alarm cutoff or manual reset.
- 260/710 Models have changeable 2 minute auto reset or manual reset
- Models 700 and 710 are available in 33" and 48" versions
- Model 700 is also available in red finish (700xRD)
- Non-handed surface installations on single or double doors

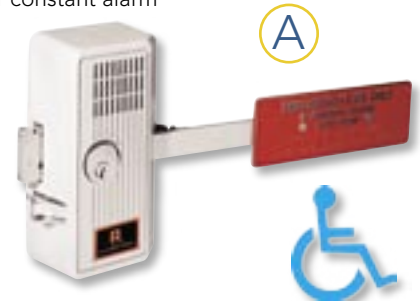

MODEL 11A

(Dead bolt only; Not for ADA applications)

- Model 11A is an exit lock designed to control unauthorized use of emergency doors. It provides trouble free service and deters theft from within and outside. Unauthorized use sounds alarm which can only be reset or bypassed with key. Standard features include 1 inch throw deadbolt, warning alarm, outside cylinder capability, tamper switch and long life battery pack. Available for use with double doors or for use with existing panic bars. Optional AC power supply. Requires standard RIM cylinder (not included).



Trilogy: Remote release mags, powermags & RTEs



Innovative remote release mag

Kit RR-PM1200PAK

- Advanced 1200 lb. Electromagnetic Lock with Infrared Remote Release
- The power of a mag with the convenience of pocket-size remote controls for reception or staffers
- Complete turnkey system includes: Advanced 1200 lb. Mag, one remote control, and plug-in AC transformer
- Plug-in 12VAC transformer eliminates the requirement for pulling wires or the services of an electrician (optional use)
- Supports up to 100 individual remote controls (AL-REMOTE)
- Releases mag from either side of door
- AL-REMOTE Keyfob features single button operation with positive "click" response
- Automatically-enrolled by system in easy programming mode and is audibly and visually confirmed
- UL-listed; CE-listed



Electromagnetic locks

PowerMag™ 12/24V

- Strong holding force of 600 and 1200 lb. models
- Perfect for both single and double doors and even sliding doors
- 5-year limited warranty
- Low voltage (12 or 24VDC); including field-selectable models
- Double door models with 1200 lb. locking per side (PM1200SLB1 and 40)

PowerExit™ Request-to-Exit Push Buttons

- Come in five models, with or without illuminated buttons
- All models have solid aluminum anodized finish US28
- Sizes: 3' x 4 3/4" x 1/4" and 1 5/8" x 4 3/4" x 1/4"
- Back Depth: 1 1/4" and 1 7/8"
- Switch Rating: 250V AC 5A
- Momentary Action



Electric door locks

Models 103 & 104RA

- Models 103 & 104RA are compact electric locks simple to install on all types of doors. The door is locked or unlocked by remote switch, key switch, time programmer or other electrical contact which interrupts the power. Model 103 is our standard "fail-safe" unit which projects the bolt only while power is "on." When the power is "off" the bolt retracts. Model 104RA (reverse action) unlike our standard unit is "fail-secure" and will project the bolt only when the power is "off." When the power is "on" the bolt retracts. 24AC/DC and 12VAC/DC models available

mags
& locks

Alarm Lock: Essential add-ons and extras

Strikes for model 11A:

Model 210K

- Strike for single or double inswinging door(s) (not included with 11A)



Model K24A

- Strike for single outswinging door (included with 11A)



Model K28

- Strike for double outswinging doors (not included with 11A)



Narrow stile mounting bars

Model 99 (pair) not shown

- 3/8" x 1" anodized aluminum bar – US28 finished. For mounting Model 11A to narrow stile (glass) doors. Specify 36" or 48". (Not Shown)

Rim cylinder

Model CER

- Required for interior arming/disarming of models 11A, 80, 250, 260, 700, 710 & 715. Includes two keys (KA or KD)



Mortise cylinder

Model CEM

- Used with the Pilfergard models PG10 and PG21/E to arm and disarm the alarm circuit. Includes two keys (KA or KD)



Cylinder finger pull

Model 711

- An inexpensive door pull for use when outside key only access is required.



Outside access door pull

Model 707

- For access from building exteriors. Installed on the outside of the door and linked to the lock. After deadbolt is retracted by outside key, a slight pull will release the deadlatch and open the door. 8" x 1 1/2". (For use with all models except Model 11A).



Battery eliminator

Model PP100

- For use with all PG10, PG21/E, PG30, 250, 700, 80, 260, 710 and 715 models. The PP100 conserves the battery which automatically takes over as the power source to sound the alarm in the event of a power failure or intentional cut-off. A built-in circuit breaker with push-button reset eliminates troublesome fuse replacements. Includes a cam lock cylinder and 6' of armored cable adequate to provide a door loop at the hinged-side of the door. Can be used with all 6V and 9V models.



Double door holder

Model 44

- The Double Door Holder secures the inactive door to the frame while the active door is closed. Releasing the active door automatically allows both doors to swing freely. Reversible, right or left hand doors. Cast aluminum 8 1/2" long, 3" wide and 2 1/2" high.



Armored door loop

Model 271

- For use with electrified locks. An easy means for bringing electric current from the hinge side of a door frame to the door. 18" flexible armored cable. End brackets are deep drawn anodized aluminum to conceal wire connections.



Single door strike

Models 730 & 725

- Model 730 supplied with models 250, 700 and 80.
- Model 730M supplied with models 260 and 710 and 80.
- Model 735 supplied with model 715.



Double door strike

Models 732 & 735

- Model 732 for use with models 250, 700 and 80.
- Model 732M for use with models 260 and 710.
- Model 735 for use with model 715. (Not Shown)




Trilogy family of access control products

MODEL/ FEATURE	DL2700	DL2800	DL3000	DL4100	PDL3000	DL3500	PDL3500	PDL4100	DL4500
Lock Type	Cylindrical	Cylindrical	Cylindrical	Cylindrical	Cylindrical Prox	Mortise	Mortise Prox	Cylindrical Prox	Mortise
User Codes	100	200	300	2000	2000	300	2000	2000	2000
Code Length	3-5 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits
Program- ming	Keypad only	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC
Vandal-Proof Keypad	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button
Trim w/Rug- ged Clutch	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever
Audit Trail Events		1000	1600	40000	40000	40000	40000	40000	40000
Scheduled events		150	150	500	500	500	500	500	500
Proximity Reader					Prox		Prox	Prox	
Privacy Residency				Privacy Residency				Privacy Residency	Privacy Residency
Classroom/ Deadbolt						CR or DB	CR or DB		CR or DB
Weather- proof -31 to 151 F	WP version	Standard	WP version	Standard	Standard	Standard	Standard	Standard	Standard
Handing	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Handed; Field Reversible	Handed; Field Reversible	Nonhanded	Handed; Field Reversible
Door Thickness	1-5/8 to 1- 7/8" (others on request.)	1-5/8 to 1- 7/8" (others on request.)	1-5/8 to 1- 7/8" (others on request.)	1-5/8 to 1- 7/8" (others on request.)	1-5/8 to 1- 7/8" (others on request.)	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8"
Backset	2-3/4" (included); 2-3/8" option.	2-3/4" (in- cluded); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included)	2-3/4" (included)	2-3/4" (included); 2-3/8" option.	2-3/4" (included)
Cylinder	Large key-in- knob, incld -or- IC Prep for Best/Fal- con/Arrow (w/o cyld.)	Large key-in- knob, incld -or- IC Prep for Best/Fal- con/Arrow (w/o cyld.)	Large key-in- knob, incld -or- IC Prep for Best/Fal- con/Arrow (w/o cyld.)	Large key-in- knob, incld -or- IC Prep for Best/Fal- con/Arrow (w/o cyld.)	Large key-in- knob, incld -or- IC Prep for Best/Fal- con/Arrow (w/o cyld.)	Generic mortise cylinder, supplied.	Generic mortise cylinder, supplied.	Large key-in- knob, incld -or- IC Prep for Best/Fal- con/Arrow (w/o cyld.)	Generic mortise cylinder, supplied.
Special Order Cylinders	Yale, Medeco, Sargenct, Corbin/ Russwin, Schlage	Yale, Medeco, Sargenct, Corbin/ Russwin, Schlage	Yale, Medeco, Sargenct, Corbin/ Russwin, Schlage	Yale, Medeco, Sargenct, Corbin/ Russwin, Schlage	Yale, Medeco, Sargenct, Corbin/ Russwin, Schlage			Yale, Medeco, Sargenct, Corbin/ Russwin, Schlage	
Relay options	yes		yes	yes	yes	yes	yes	yes	yes
Battery/ Cycles Typ.	5AA; 100000	5AA; 100000	5AA; 100000	5AA; 100000	5AA; 60000	5AA; 100000	5AA; 60000	5AA; 60000	5AA; 60000
Ratings	BHMA Grade 1 Lockset; 3hr. Fire Rated Latch	BHMA Grade 1 Lockset; 3hr. Fire Rated Lockset	BHMA Grade 1 Lockset; 3hr. Fire Rated Lockset	BHMA Grade 1 Lockset; 3hr. Fire Rated Lockset	BHMA Grade 1 Lockset; 3hr. Fire Rated Lockset	BHMA Grade 1 Lockset 3 Hr Fire	BHMA Grade 1 Lockset 3 Hr Fire	BHMA Grade 1 Lockset; 3hr. Fire Rated Lockset	BHMA Grade 1 Lockset 3 Hr Fire
Architectural Finishes	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B


Ordering Information

	PDL4500	ETDL	ETPDL	DK3000	PDK3000
	Mortise Prox	For use w/panic device	For use w/panic device	Standalone Keypad	Standalone Keypad
	2000	2000	2000	2000	2000
	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits
	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC
	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button
	Straight or curved lever	Straight or curved lever	Straight or curved lever		
	40000	40000	40000	40000	40000
	500	500	500	500	500
	Prox		Prox		Prox
	Privacy Residency				
	CR or DB				
	Standard	Standard	Standard	Standard	Standard
	Handed; Field Reversible	Nonhanded.	Nonhanded.		
	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)		
	2-3/4" (included)				
	Generic mortise cylinder, supplied.	Generic Rim Cylinder, supplied. Other mfrs. Cylinder Adapters must be ordered separately.	Generic Rim Cylinder, supplied. Other mfrs. Cylinder Adapters must be ordered separately.		
	yes	yes	yes	yes	yes
	5AA; 60000	5AA; 60000	5AA; 60000		
	BHMA Grade 1 Lockset 3 Hr Fire	BHMA Grade 1 Lockset	BHMA Grade 1 Lockset	UL	UL
	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5 & 10B	US26, US26D, US3, US5, 10B, Metallic Silver or Bronze	US26, US26D, US3, US5, 10B, Metallic Silver or Bronze


Cylindrical Trilogys

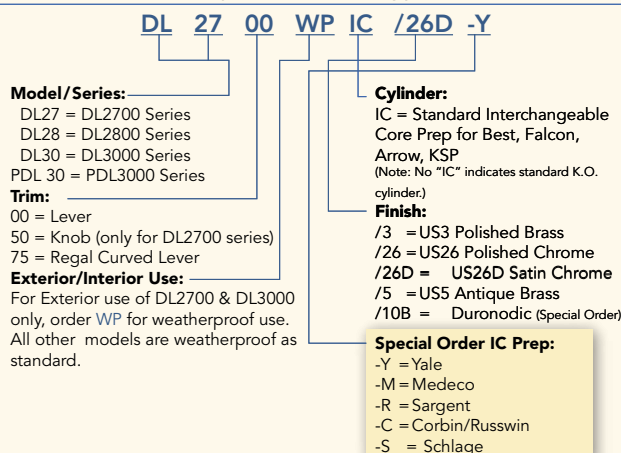


Mortise Trilogys

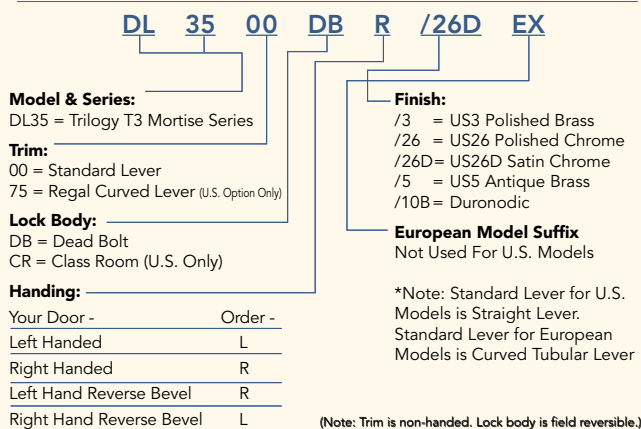

Trilogy Narrow Stile

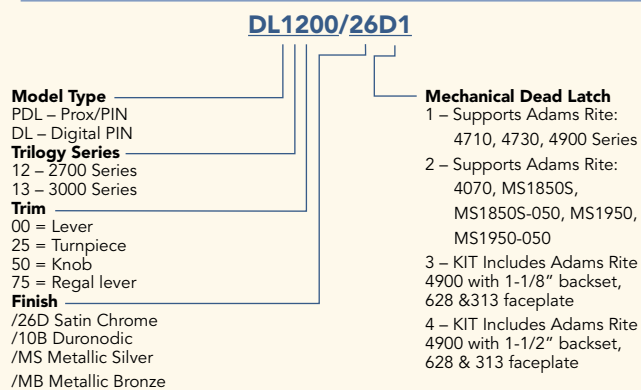

Trilogy Exit

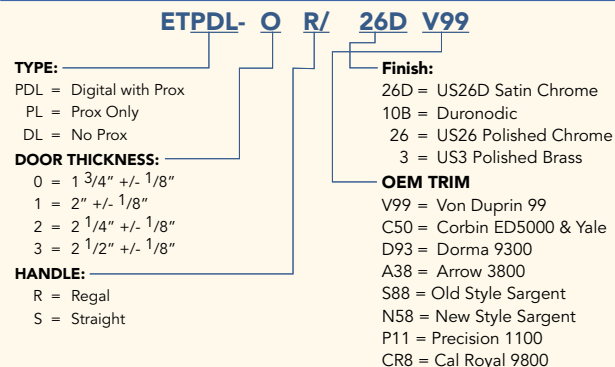

Trilogy: The leader in electronic pushbutton locks



Trilogy provides a simple solution to implementing **HIPAA** regulations and securing private health information records with the minimum effort and fuss – guaranteed.

For all those who handle patient records:

Are they secure around the clock? Who accessed them, when?

Those who access these files must be logged for later reference. Trilogy locks by Alarm Lock are HIPAA compliant by design, citing chapter and verse, below:



**“Security Standards for Health Information
(Public Law 104-191; Item D, Section 1173)
(1) Security Standards. – (shall) take into account:**

About HIPAA (Health Insurance Portability and Accountability Act):

HIPAA (US Health and Human Services Law 104-191) is a statute enacted in 1996 by Congress to encourage national standards to protect the privacy of Personal Health Information (PHI). HIPAA Compliance, is required by institutions handling confidential patient records. The US Department of Health and Human Services issued the Privacy Rule to implement the requirements of HIPAA. This rule addresses the use and disclosure of individual's protected health information, as well as standards for individuals' privacy rights to understand and control how their health info. is used. **Deadlines for all Health Care Providers, including health plans, their administrators and their clearing houses, have now all expired.**

To comply, a covered entity must develop and implement policies and procedures that restrict access and uses of protected health information based on specific roles of the members of their workforce. They must identify the persons, or classes of persons in the workforce who need access to protected health information to carry out their duties, the categories of protected health information to which access is needed and any conditions under which they need the information to do their jobs.

“the value of audit trails in record systems.” (iv)

- Get 40,000 event audit trails from the Trilogy Lock locally or at your PC. Know who entered what door by date and time and name.

“the costs of security measures;” (ii)

- Trilogy locks: Economically and easily installed in less than an hour, retrofitting any lockset. No wires to run. Use inside or out, including weather extremes.
- 2000 user PINs or ID Cards supported at each lock.
- Self-contained, battery operated. No keys to manage. Key override including your choice of optional IC cores.

“the need for training persons who have access to health info.” (iii)

- Easy to use with 3 to 6 digit PINs. No user training required.
- Keypad programmable for master, management and user code hierarchy, with lockdown, group lockout or individual user code disable – tool-free.
- With one finger, managers can add authorized users and/or disable any staffer or ex-staffer's code in seconds, too--without delays and expense getting any keys back or rekeying locks.

To avoid fines of \$25,000 to \$250,000:

“covered entities (shall) provide records and compliance reports and cooperate with and permit access to information for investigation”

- Get hard copy records or store electronic files of up to 40K Audit trails and door access, example, door to medical records room A-M, by time, date and user. Query use with Trilogy's handheld printer or archive at your PC using Trilogy Windows.

“Data must be safeguarded ... Example: securing medical records with lock and key or pass code, and limiting access to keys or pass codes.”

The proven choice of more hospitals, firms and institutions –

For more than three decades ...



Alarm Lock Systems, Inc. has built a strong reputation as a respected leader in the design and manufacture of electronic and mechanical access and egress control products. Originally known worldwide for its superior Sirenlock™ panic exit and delayed egress exit alarms in full-door and clapper styles, Alarm Lock has nearly eclipsed its original product success with that of another – the incredibly-popular, innovative Trilogy® line of standalone access locks. These aesthetically-pleasing, durable electronic digital locks, also known as the Trilogy T2 and T3 Series, are growing strong. Used by today's best-known, leading retailers, colleges and institutions around the globe, handsome Trilogy locks come in weatherproof models, as well as cylindrical, mortise, new narrow style and exit trim lock models. Many offer easy to use, free Windows based PC programming software plus audit trail that allows a log of all entry activity to be printed to either a handheld infrared printer or a Windows-based PC. Many models even offer real-time locking and event scheduling for weekends, holidays and the like, selected by lock and by user or user group, for real labor savings. Trilogy prox locks combine the key features of established standalone Trilogy locks with proximity technology. Compatible with virtually all HID systems cards and keyfobs, All Trilogy prox lock models bridge the gap between single door and badged access systems.

Trilogy is the choice of prestigious universities, leading retailers, top chain stores, hospitals, laboratories, airports and office facilities – everywhere secured access or egress is a concern. With Alarm Lock's wide range of electronic access locks, Trilogys push all the right security buttons for security directors, business owners, and facility managers, who know that Alarm Lock's keyless access dependably promises time-automated security and a wealth of management information. Meanwhile, Alarm Lock's door alarms and panic exit hardware devices remain a security industry staple.



offices



retail



airports



schools



pharmacies



hospitals

advanced
access &
egress
solutions



offices



retail



airports



schools



pharmacies



hospitals

Alarm Lock: Keyless access locks trusted by more leading retailers, firms, hospitals, schools & airports



345 Bayview Avenue • Amityville, NY 11701 • USA
1-800-ALA-LOCK • 631-789-4871 • Fax: 631-789-3383
www.alarmlock.com

A Napco Security Group Company
Publicly traded on NASDAQ: **NSSC**

Trilogy® is a registered trademark of Alarm Lock. Sirenlock is a trademark of Alarm Lock. ©Alarm Lock, 2006 Specifications subject to change. Patents Pending.
ALA112K